


SOLYX®

Dichroic Frost Window Film Specification Sheet

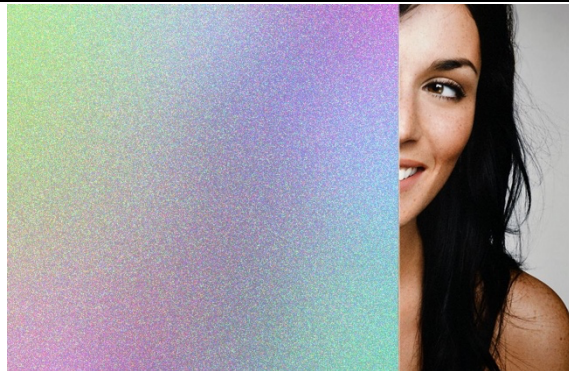

Product Details

Dichroic Frost window film glistens in direct sunlight and is a beautiful, dichroic frost film. It shifts through a rainbow of colours with a change in light or movement.

Flammability Rating

This product meets Class B, s1, d0, as specified in BS EN 13501-1:2018.

LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

Specification

Product Code	SXD-4290
Film Type	Vinyl
Adhesive Type	Static Cling
Usage	Interior
Available Roll Width(s)	60.95cm / 24"
Thickness	305 micron
Visible Light Transmission	75%
UV Transmission	7%
IR Transmission	75%

Installation & Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same methods used for installing window films.

Warranty

This product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

Product Construction

Face Film

305 micron Vinyl

Adhesive

Static Cling

Release Liner

Transparent Synthetic

Contact Information

Surface Designs

Tel: +44 (0) 800 970 6366

Email: sales@surfacedesigns.com

Web: www.surfacedesigns.com